

**DF-0101 DIGITAL
FREQUENCYMETER
96x96mm SIZES**

INTRODUCTION

These state-of-the-art panel meters are designed for accurate measurement of the AC RMS voltage in single-phase systems.

Devices have separate inputs for supply and measurement.

**PRECAUTIONS FOR INSTALLATION
AND SAFE USE**




**Failure to follow below
instructions will result in
death or serious injury**

- Do not open the unit. There is no serviceable parts inside.
- Fuses must be connected to the power supply and phase voltage inputs, in close proximity of the unit.
- Fuses must be of fast type (FF) with a maximum rating of 6A.
- Disconnect all power before working on equipment.
- When the unit is connected to the network do not touch terminals.
- Do not try to clean the device with solvent or the like. Only clean with a dry cloth.
- Verify correct terminal connections before applying power.
- Electrical equipment should be serviced only by competent service personnel. No responsibility is assured by the manufacturer or any of its subsidiaries for any consequences arising out of the use of this material.
- Only for front panel flush mounting.


Before installation

- Read the user manual carefully, determine the correct connection diagram.
- Remove all connectors and mounting brackets from the unit, then pass the unit through the mounting opening.
- Put mounting brackets and tighten. Do not tighten too much, this can brake the enclosure.
- Make electrical connections with connectors removed from sockets, then place connectors to their sockets.
- Note that the power supply terminal is separated from measurement terminals, with common neutral point.


CONNECTION DIAGRAM

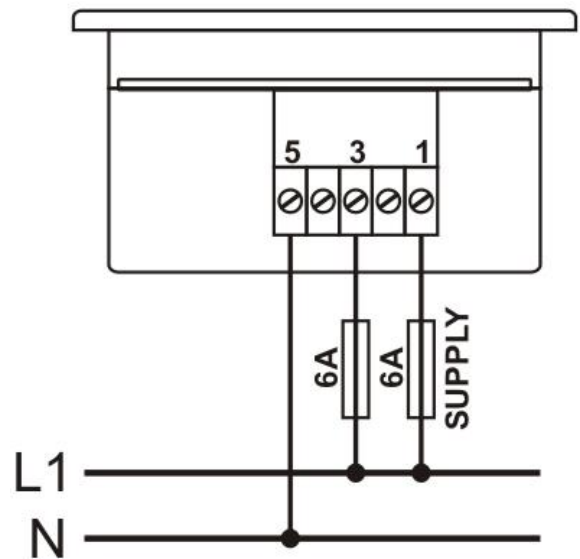

PANEL CUTOUT DIMENSIONS

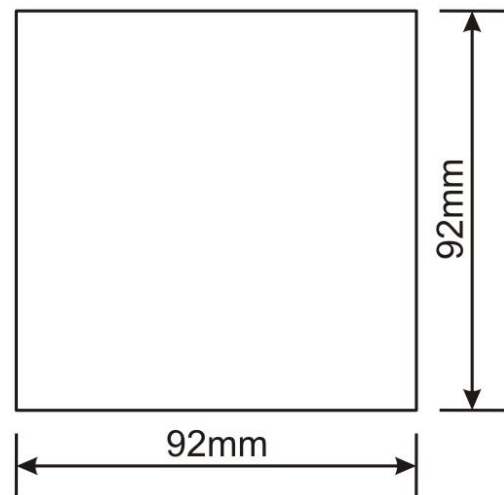

MOUNTING TOLERANCES

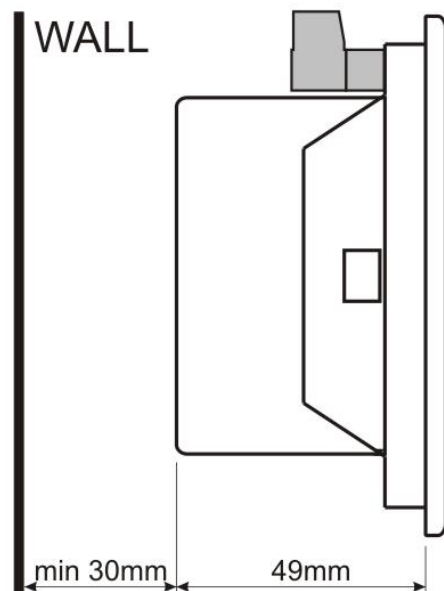

TECHNICAL SPECIFICATIONS

Power Supply Input:

170 - 275VAC

50 - 60Hz nominal ($\pm 10\%$)

Different AC/DC supply values available.

Measurement Inputs: 10 - 300 V AC

Accuracy: 0.5% + 1 digit

Power Consumption: < 1.5W

Burden: < 0.1VA per phase

Operating Temperature: -40°C to +70 °C

Maximum Humidity: 95% non-condensing.

Degree of Protection: IP 54 (Front Panel)

IP 30 (Back panel)

Enclosure:

Non-flammable, ROHS compliant, high temperature ABS/PC (UL94-V0)

Installation:

Flush mounting with rear retaining brackets

Dimensions: 102x102x53mm (WxHxD)

Panel Cutout Dimensions: 92x92mm

Weight: 185 gr

EU Directives Conformity:

2006/95/EC (low voltage)

2004/108/EC (EMC)

Norms of reference:

EN 61010 (safety requirements)

EN 61326 (EMC requirements)

PACKAGING INFORMATION

Pieces per Package: 12 Pcs

Package Size: 280 x 170 x 215mm (LxWxH)

Package Weight: 2.5 kg

